


Smartech Extrusion Range Single Glazed



The
smarter
choice by
design
Smartech[™]



Lintel Head Extrusions

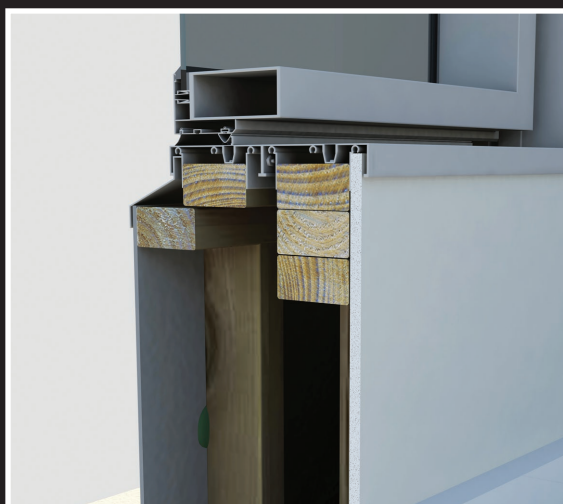

Bottom Sill Extrusions

Smartech[™]
Moving spaces.




Lintel Head Extrusion


The Lintel Head Extrusion allows the inside edge of the opening to be finished from inside and out. When using the Lintel Head Extrusion, the plaster fits within the extrusion for a professional and neat finish. Rubber seals have been added to hide screws that hold the Lintel Head Extrusion in place. A double-seal system is used with comfort in mind.

Bottom Sill Extrusion

The Bottom Sill Extrusion ensures clean lines are not obstructed with technical features. The Bottom Sill Extrusions allow internal plaster to fit inside the extrusion so the job is finished to exacting standards, and as always with our double rise seal system applied. Creating the 12mm aluminium rise to 30mm from the sill allows for the main bottom rubber to seal the Smart-Tilt Window System perfectly, creating that perfectly finished look our customers expect.

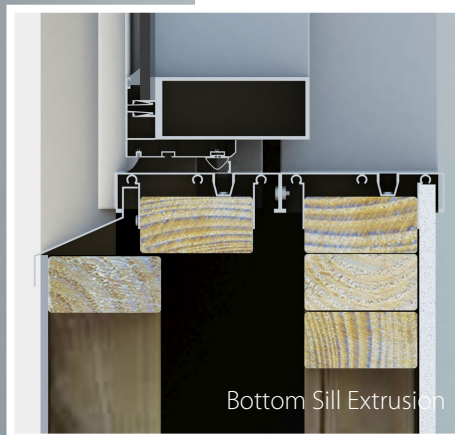

Bottom Sill Extrusion

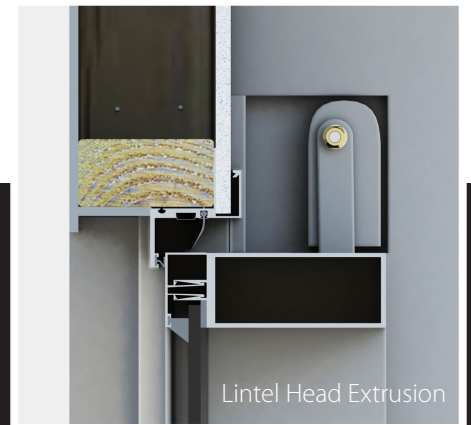

Lintel Head Extrusion

SmartechTM

Moving spaces.

Head Office & Production Facility

📍 42 Paraweena Drive Truganina Victoria 3029

☎ 03 9747 9233

✉ sales@smartechdoorsystems.com.au

🌐 www.smartechdoorsystems.com.au

www.smartechdoorsystems.com.au